

Approved 01/31/2016
kcoleman



PUGET
SOUND
ENERGY

Job#108589839

12526 Totem Lake Blvd NE, Kirkland, WA


January 08, 2016

Sheet 1 of 1 Eduard.Volianskiy@pse.com

(425) 4246428

See permit
conditions for
requirements for
sidewalk and bike
lane closures

- Notes:
1. All signs and spacing to conform to the MUTCD and City of Kirkland standards.
 2. All sidewalks, driveways, exits and egresses shall be completely clear unless otherwise indicated.
 3. Channelizing devices are 28" traffic cones.
 4. Sign size can be a minimum of 48" x 48" and shall not obstruct pedestrian access.
 5. Crew is required to leave a minimum of 11' for traveling lane width.
 6. Alert affected residents and businesses.
 7. Work to take place between 9 a.m. and 4 p.m.
 8. Work area will be 27' W of C/L of 120th Ave NE & 225' S of C/L of Totem Lake Way.

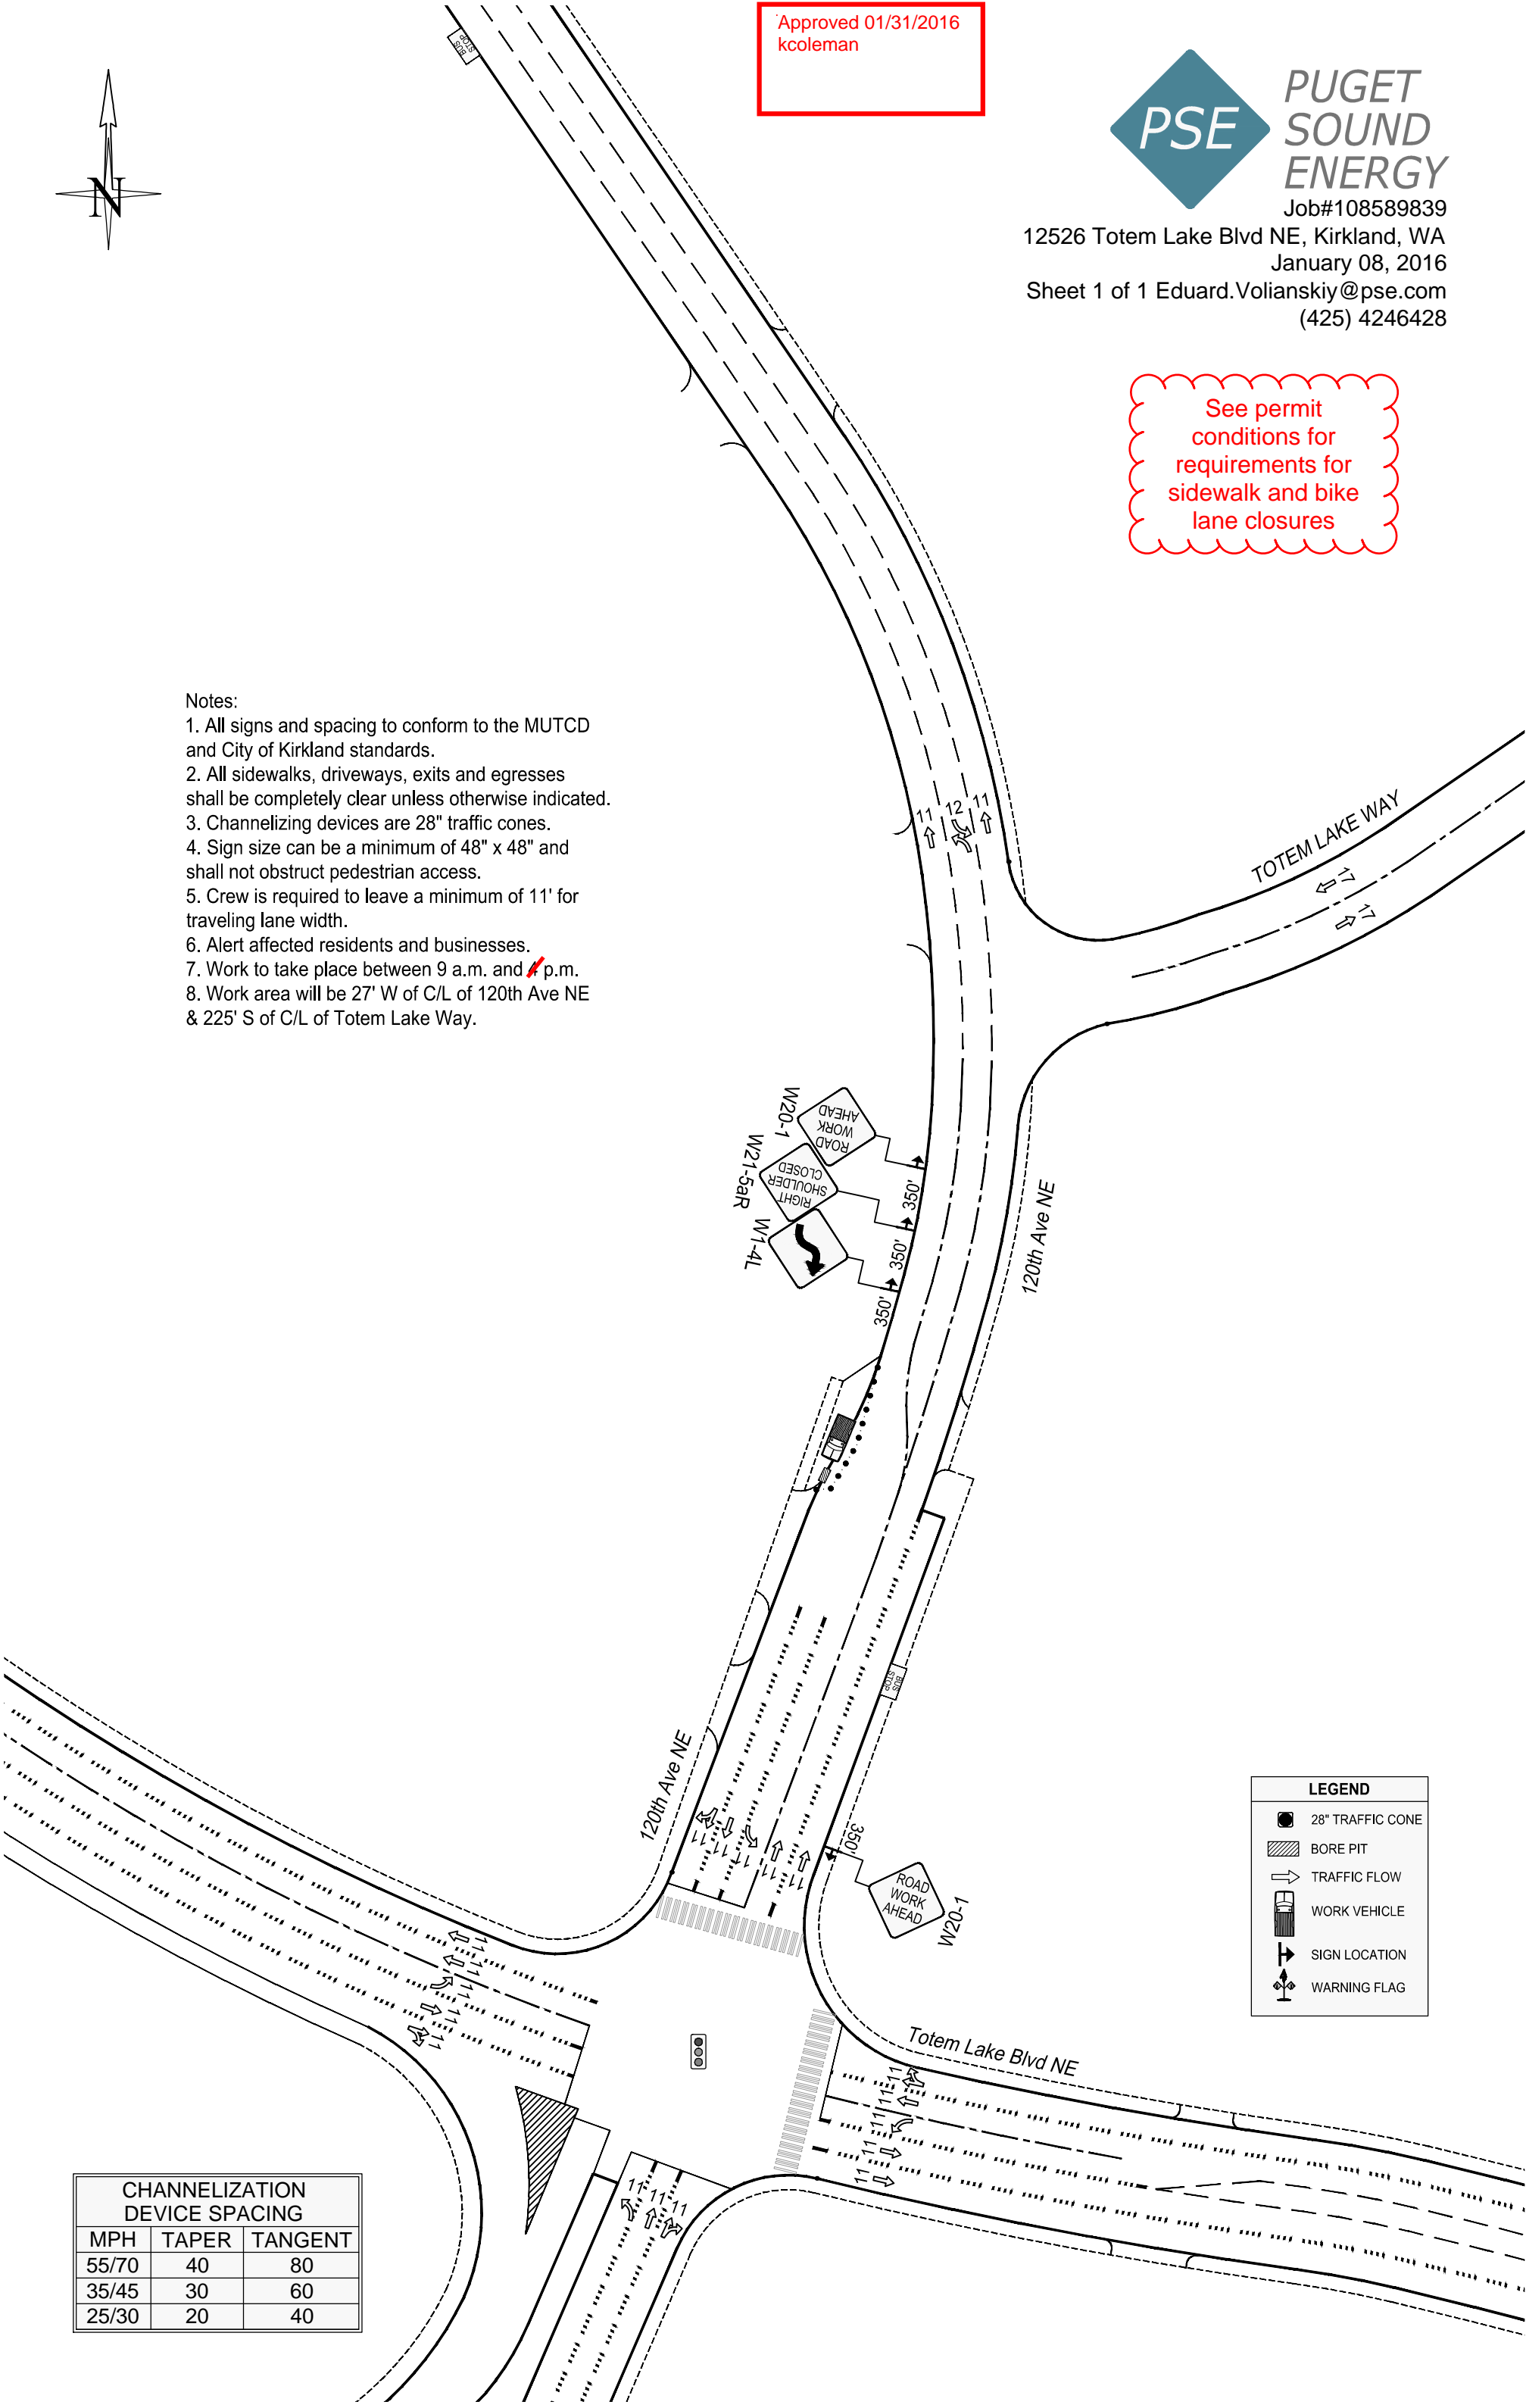

CHANNELIZATION DEVICE SPACING		
MPH	TAPER	TANGENT
55/70	40	80
35/45	30	60
25/30	20	40